



X-Treme Tablet Generation 2 Battery Replacement

This guide will enable a user to replace the battery for the X-Treme Tablet Generation 2.

Written By: Mike Longshore





TOOLS:




- [Spudger](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Soldering Station](#) (1)
-

Step 1 — Battery



- **Remove back cover** Using a spudger and pry tool, carefully pry the back cover off of the main body, starting at the top corner. Continue around the device, being careful to not dislodge the power button.

Step 2

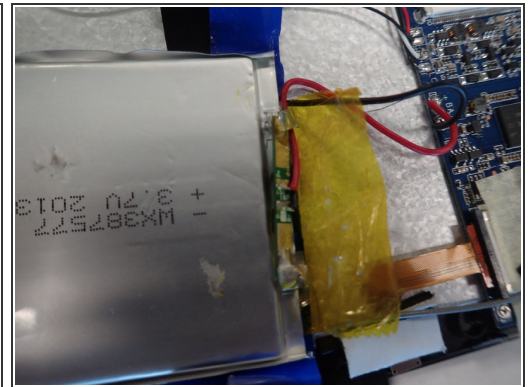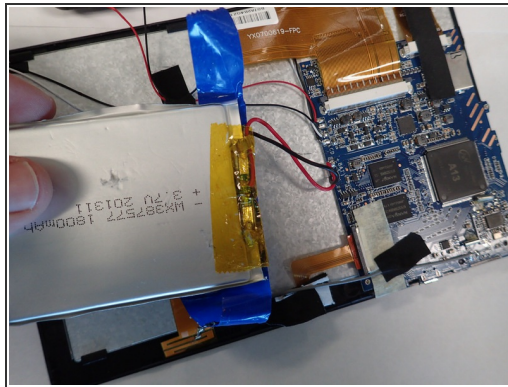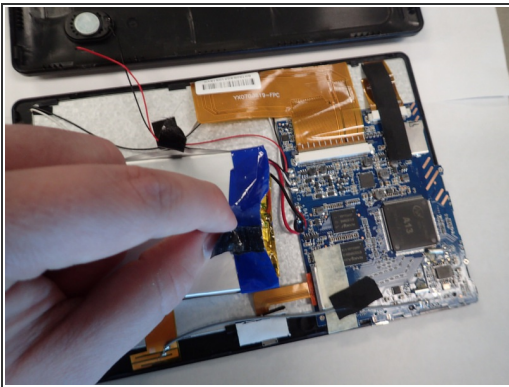

- **Remove battery** Pull the cloth tape from the battery to free the body of the battery. Using a solder vacuum and soldering iron, release the red wire from the motherboard first, followed by the black.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-17 02:18:10 PM.